


## PRODUCTPROFILE

**Catalogue number: 230A4203**

Partnumber: 773504

---


19"-Spleißgehäuse ECO  
1 HE, RAL 7035, mit Teleskopvollauszug  
Aluminium Korpus  
Stecksystem: SC/SC, 9µ  
Anzahl Fasern: 48  
4xSPK,1xPG16

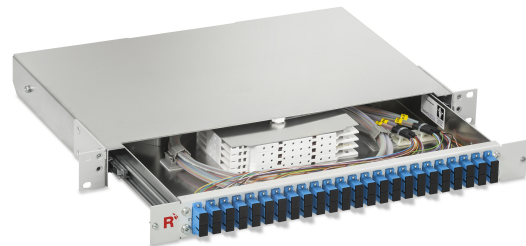

**Related documents:**

19Z-GEHÄUSEZUBEHÖR\_OE  
DS\_FASER G657A1\_OE  
DS\_SC\_STECKER\_OE

Produktinformation  
Fiber Data Sheet  
Steckerdatenblatt

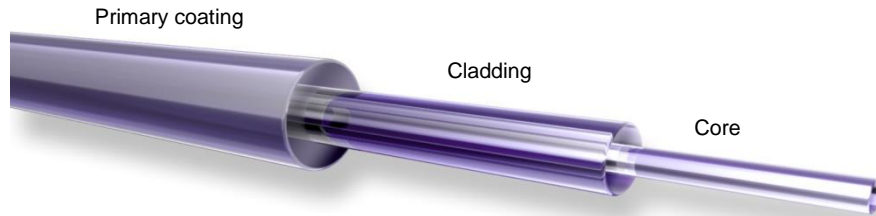

**Standards**

Stepped index fiber 9/125µm according to  
 -ISO/IEC 11801 und EN 50173-1 OS2  
 -IEC 60793-2-50 type B1.3  
 -ITU G.657.A1 und G.652.D

**Structure**

Silica fiber with two layer acrylate primary coating

**Geometrical properties**

|                                |                    |
|--------------------------------|--------------------|
| Modefield diameter @1310 nm    | 9.2 µm +/- 0.4 µm  |
| Modefield diameter @1550 nm    | 10.4 µm +/- 0.5 µm |
| Cladding diameter              | 125 µm +/- 0.07 µm |
| Cladding non-circularity       | ≤ 0.7 %            |
| Core-Cladding concentricity    | ≤ 0.5 µm           |
| Primary coating diameter       | 242 µm +/- 5 µm    |
| Coating-Cladding concentricity | < 12 µm            |

**Mechanical properties**

Break strength SCREEN-Test 1 % strain for 1 s @100 kpsi

**Thermal properties**

Operating temperature range -60 to +85°C

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger OSI GmbH & Co. OHG

**Transmission characteristics**

**Attenuation:**

**Cabled fiber tight buffered:** @ 1310 nm max. 0.38 dB/km  
@ 1550 nm max. 0.28 dB/km

**Cabled fiber loose tube:** @ 1310 nm max. 0.36 dB/km  
@ 1550 nm max. 0.22 dB/km

**Uncabled fiber:** @ 1310 nm max. 0.32 dB/km  
@ 1383 nm max. 0.32 dB/km  
@ 1490 nm max. 0.21 dB/km  
@ 1550 nm max. 0.18 dB/km  
@ 1625 nm max. 0.20 dB/km

**Macrobending, induced attenuation, uncabled fiber:**

Radius 10 mm, 1 turn, @ 1550 nm ≤ 0.50 dB  
Radius 10 mm, 1 turn, @ 1625 nm ≤ 1.50 dB  
Radius 15 mm, 10 turns, @ 1550 nm . 0.05 dB  
Radius 15 mm, 10 turns, @ 1625 nm ≤ 0.30 dB  
Radius 25 mm, 100 turns, @ 1310, 1550 und 1625 nm ≤ 0.01 dB

**Dispersion:**

@ 1285 - 1330 nm ≤ 3.0 ps/(nm\*km)  
@ 1550 nm ≤ 18.0 ps/(nm\*km)  
@ 1625 nm ≤ 22.0 ps/(nm\*km)

**Polarization Mode Dispersion (PMD):**

PMD Link Design Value ≤ 0.04 ps/√km  
Maximum individual fiber PMD ≤ 0.1 ps/√km

**Cut-off-Wavelength:** ≤ 1260 nm

**Effective group index of refraction:**


@ 1310 nm 1.4676  
@ 1550 nm 1.4682

**Backscatter attenuation @ 1ns pulse width:**


@ 1310 nm -77 dB  
@ 1550 nm -82 dB  
@ 1625 nm -83 dB

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.



| Draft       | Date     | Approved | Date     | Rev. | Engineering change number | Name        | Date     |
|-------------|----------|----------|----------|------|---------------------------|-------------|----------|
| H. Jungbäck | 12-04-15 | P. Maier | 12-04-15 | 001  | without                   | H. Jungbäck | 12-04-15 |

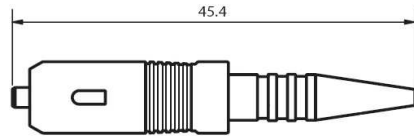


SC-simplex, buffered fiber



SC-simplex, cable

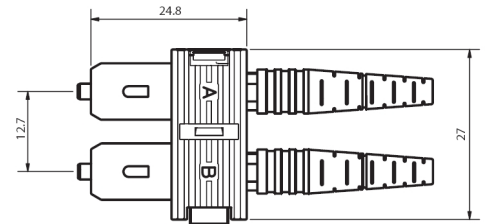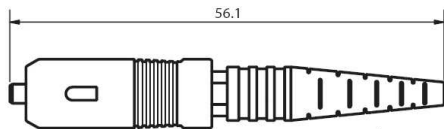

SC-duplex

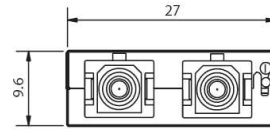

All dimensions are in mm; tolerances acc. ISO 2768 m-H

**Properties**

Standard SC connectors for applications in telecommunications, data center, cabling and LAN, connections to active components.

**Interface**

SC, acc. to IEC 61754-4

**Material for connectors**

Ferrule : Zirconia ceramic, Ø 2.5 mm  
 Body : Plastics  
 Boot : Plastics

**Optical data**

|                      | Typical                              | max.    |
|----------------------|--------------------------------------|---------|
| Insertion Loss : S/M | 0.20 dB                              | 0.40 dB |
| M/M                  | 0.20 dB                              | 0.40 dB |
| Return Loss : S/M    | ≥45 dB(PC), ≥55 dB(UPC), ≥65 dB(APC) |         |
| M/M                  | ≥30 dB                               |         |

**Mechanical data**

Mating cycle ≥ 1000  
 Strain relief 100 N(dependent on the cable type)

**Environmental data**

Operation temperature range -40°C to +85°C  
 Storage temperature range -40°C to +85°C

**Suitable cables**

Cable Types : Ø 0.9 ~ 3.5 mm

**Packaging**

Standard Packaging.

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger OSI GmbH & Co. OHG

| Connector Part                       | Part No        |
|--------------------------------------|----------------|
| <b>Connector Body</b>                |                |
| Singlemode, PC, blue                 | 98 SCS 120-101 |
| Singlemode, APC, green               | 98 SCS 110-101 |
| Multimode, 50 µm, black              | 98 SCS 130-101 |
| Multimode, 62.5 µm, beige            | 98 SCS 130-102 |
| <b>Duplex clip, black</b>            | 98 ZD 02-0BK   |
| <b>Crimp sleeve</b>                  |                |
| for Ø 2.1                            | 98 ZC 05-000   |
| for Ø 2.8-3.5                        | 98 ZC 04-000   |
| <b>Boot, Ø 0.9 mm buffered fiber</b> |                |
| blue                                 | 98 ZB 06-0BU   |
| green                                | 98 ZB 06-0GN   |
| black                                | 98 ZB 06-0BK   |
| yellow                               | 98 ZB 06-0YE   |
| red                                  | 98 ZB 06-0RD   |
| <b>Boot, Ø 2.1 mm cable</b>          |                |
| blue                                 | 98 ZB 05-0BU   |
| green                                | 98 ZB 05-0GN   |
| black                                | 98 ZB 05-0BK   |
| yellow                               | 98 ZB 05-0YE   |
| red                                  | 98 ZB 05-0RD   |
| <b>Boot, Ø 2.8-3.5 mm cable</b>      |                |
| blue                                 | 98 ZB 04-0BU   |
| green                                | 98 ZB 04-0GN   |
| black                                | 98 ZB 04-0BK   |
| yellow                               | 98 ZB 04-0YE   |
| red                                  | 98 ZB 04-0RD   |



Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger OSI GmbH & Co. OHG

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft   | Date       | Approved   | Date       | Rev. | Engineering change number | Name    | Date       |
|---------|------------|------------|------------|------|---------------------------|---------|------------|
| Y.Zhang | 29.03.2017 | H.Jungbäck | 29.03.2017 | 002  | ---                       | Y.Zhang | 29.03.2017 |