


## PRODUCTPROFILE

### Catalogue number: 820A1019M-1,0

Partnumber: 766112

Patchcord Copper, Cat. 6A  
Connector side A: RJ45 Inelco, 2C boot,  
protective cap  
Connector side B: RJ45 Inelco, 2C boot,  
protective cap  
screened on both sides  
boot color: grey  
Leoni Kerpen MegaLine F6-90 flex, S/FTP, grey  
Coding: uncrossed 1:1 (standard)  
length: 1,0m

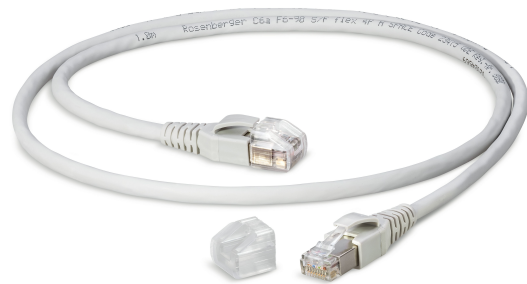

#### **Related documents:**

DS\_RJ45-PATCHKABEL-C6A\_OE  
GHMT\_Z5877X-XX-E

DS\_RJ45-Patchkabel-C6A\_oe  
GHMT-Zertifikat\_RJ45-PK-C6A\_z5877X-XX-E


RJ45 Patch Cord Cat. 6<sub>A</sub> ISO/IEC  
Shielded, FRNC-LSZH

**Description**

RJ45 Patch Cord Cat. 6<sub>A</sub> ISO/IEC shielded indoor cable FRNC-LSZH coding 1:1 TIA 568 B Applications: IEEE802.3; 10Base-T; 100Base-T; 1000Base-T; 10GBase-T; IEEE 802.5 16MN; ISDN; FDDI; ATM, VoIP, PoE, PoE+, FC 1/2/4 Gbit/s.

**Cable Type**

Cat.7 S/FTP, flex, 4 PIMF AWG27/7 acc. to EN 50288 and IEC 61156 indoor cable, FRNC-LSZH specified up to 900MHz Flameability: Acc. to IEC 60332-1-2 Halogen free: Acc. to IEC 60754-1/2 Smoke density: Acc. to IEC 61034-1/2 Diameter: 5.7 mm Color: grey Other data see cable data sheet

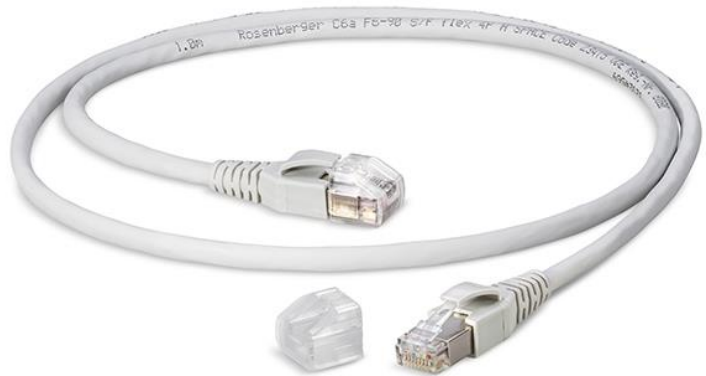

**GHMT PVP certificate  
No.: z4826X-XX-E**



**Connector type**

RJ45 (8/8) shielded acc. to IEC 60603-7-1 With 2 component boots with latch protection and protective cap. Technical data see Connector data sheet

**Operating temperature range**

-10 to + 60°C

**Delivery form**

As cable ring in foil bag

**Part Numbers**

Length 1 m: 820A1019M-1  
Length 2 m: 820A1019M-2  
Length 3 m: 820A1019M-3  
Length 5 m: 820A1019M-5  
Length 10 m: 820A1019M-10

Part numbers of other lengths on request

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright. • Rosenberger OSI GmbH & Co. OHG

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
H. Jungbäck	2015-09-04	P. Maier	2015-09-07	003	---	S.David	2017-12-06